
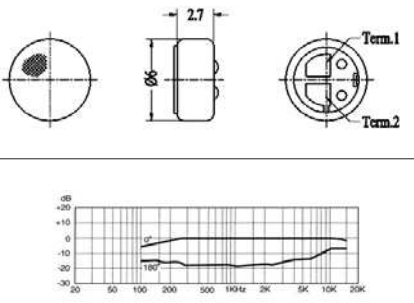

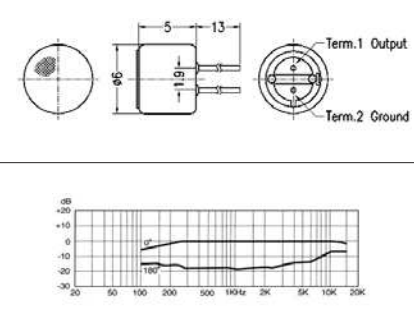



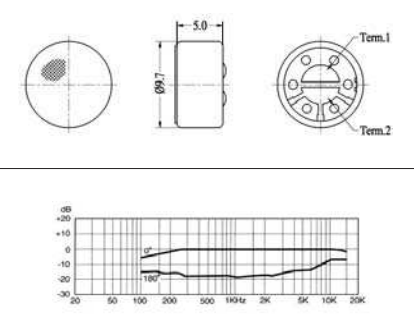
LF-M6027-U series

	<p>Vs=3V, RL=2.2Kohm Sensitivity / 靈敏度: -42~ -60dB (0dB=1V/Pa, 1KHz) Impedance / 阻抗: Less than 2.2Kohm Directivity / 指向性: Unidirectional Frequency / 頻率: 100~12,000Hz Standard operation voltage / 中心工作電壓: 3V Operation voltage / 工作電壓: 10V (max). Current consumption / 消耗電流: Max. 0.5mA Sensitivity reduction / 靈敏度減少: Within -3dB at 1V S/N ratio / 訊號雜音比: More than 55dB</p>	
---	--	---


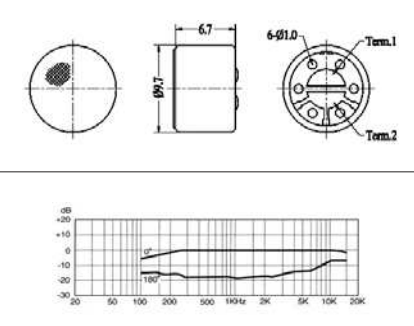
LF-M6050-U series

	<p>Vs=3V, RL=2.2Kohm Sensitivity/ 靈敏度: -42~-60dB (0dB=1V/Pa, 1KHz) Impedance / 阻抗: Less than 2.2Kohm Directivity / 指向性: Unidirectional Frequency / 頻率: 100~12,000Hz Standard operation voltage / 中心工作電壓: 3V Operation voltage / 工作電壓: 10V (max). Current consumption / 消耗電流: Max. 0.5mA Sensitivity reduction / 靈敏度減少: Within -3dB at 1V S/N ratio / 訊號雜音比: More than 55dB</p>	
--	--	--

LF-M9750-U, LF-M9752-U series

	<p>Vs=1.5V, RL=680Kohm Sensitivity / 靈敏度: -44~-60dB (0dB=1V/Pa, 1KHz) Impedance / 阻抗: Less than 680Kohm Directivity / 指向性: Unidirectional Frequency / 頻率: 100~16,000Hz Standard operation voltage / 中心工作電壓: 1.5V Operation voltage / 工作電壓: 10V (max). Current consumption / 消耗電流: Max. 0.5mA Sensitivity reduction / 靈敏度減少: Within -3dB at 1V S/N ratio / 訊號雜音比: More than 60dB</p>	
---	---	---

LF-M9767-U series

	<p>Vs=1.5V, RL=680Kohm Sensitivity / 靈敏度: -44~ -60dB (0dB=1V/Pa, 1KHz) Impedance / 阻抗: Less than 680Kohm Directivity / 指向性: Unidirectional Frequency / 頻率: 100~16,000Hz Standard operation voltage / 中心工作電壓: 1.5V Operation voltage / 工作電壓: 10V (max). Current consumption / 消耗電流: Max. 0.5mA Sensitivity reduction / 靈敏度減少: Within -3dB at 1V S/N ratio / 訊號雜音比: More than 60dB</p>	
---	--	---