
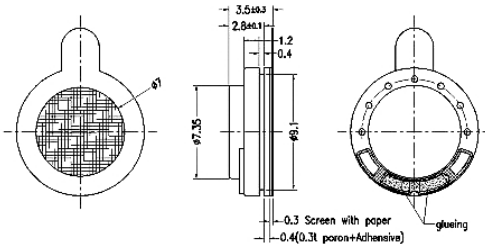
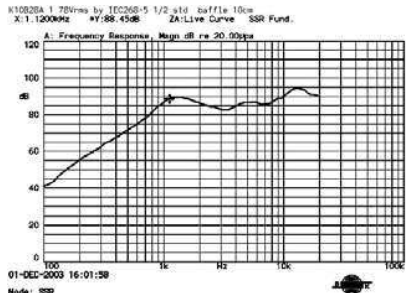

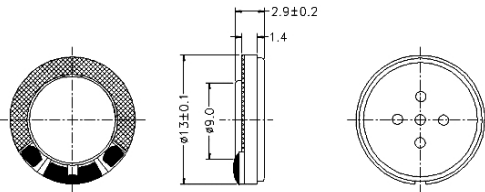
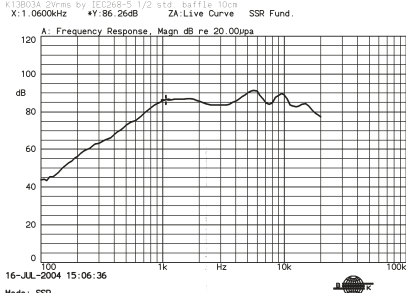

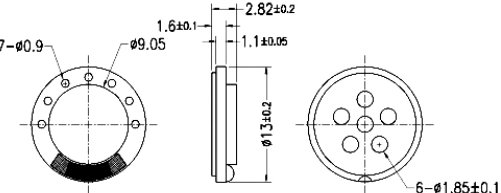
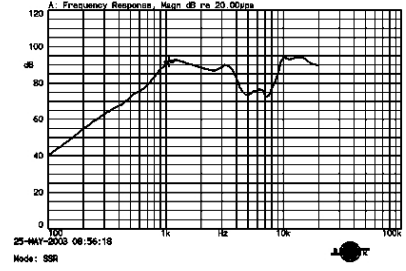

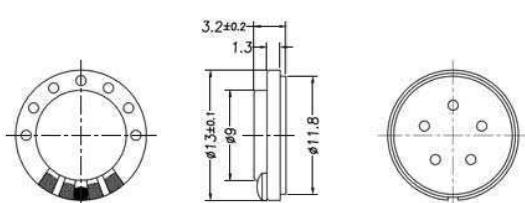
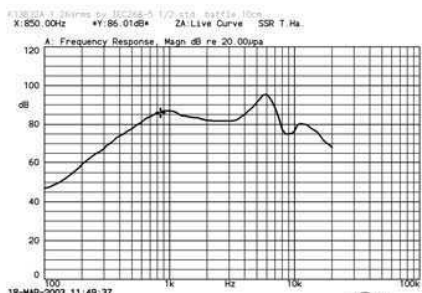

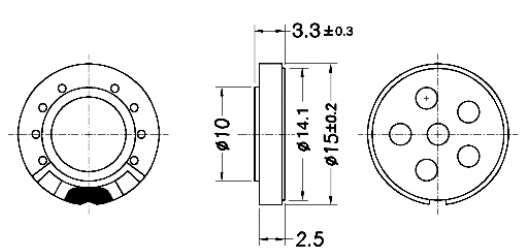
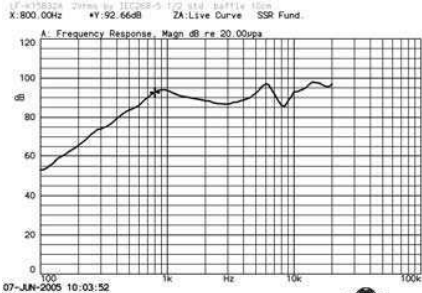


Part No.	K10B28A	K13B03A	K13B28A
Nominal Impedance	8Ω ±15%	8Ω ±15%	8Ω ±15%
Resonant frequency(Fo)	1100Hz±15%	1080Hz±15%	1100Hz±20%
Effective Freq. Range	Fo~20KHz	Fo~20KHz	Fo~3.5KHz
Sound Pressure Level(dB)	85±3dB / 10cm	85±3dB / 10cm	87±3dB / 10cm
Input Power (Nom. / Max.)	0.4W / 0.8mW	0.5W / 0.6W	0.3W / 0.5W
Distortion	10%max. at 1KHz	5%max. at 2KHz	10%max. at 1KHz
Operating Temp range	-20°C ~+70°C	-25°C ~+60°C	-25°C ~+60°C

<p>K10B28A</p> 		
<p>K13B03A</p> 		
<p>K13B28A</p> 		

Part No.	K13B32A	K15B32A	K15B34F
Nominal Impedance	8Ω ±15%	8Ω ±15%	8Ω ±15%
Resonant frequency(Fo)	860Hz±20%	800Hz±20%	950Hz±20%
Effective Freq. Range	Fo~20KHz	Fo~20KHz	Fo~20KHz
Sound Pressure Level(dB)	80±3dB / 10cm	90±3dB / 10cm	85±3dB / 10cm
Input Power (Nom. / Max.)	0.2W / 0.25W	0.5W / 0.7W	0.5W / 0.7W
Distortion	10%max. at 1KHz	5%max. at 2KHz	5%max. at 1KHz
Operating Temp range	-20°C ~+70°C	-25°C ~+60°C	-20°C ~+60°C

<p>K13B32A</p> 		
<p>K15B32A</p> 		
<p>K15B34F</p> 