
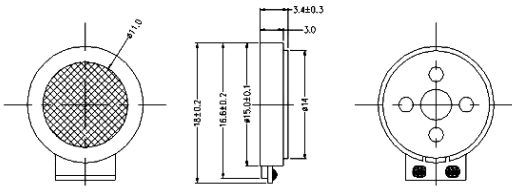
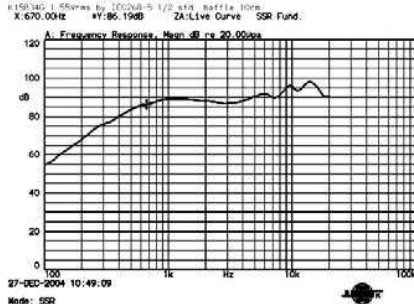

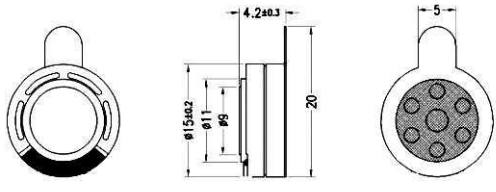
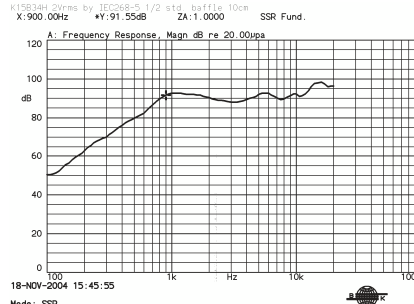

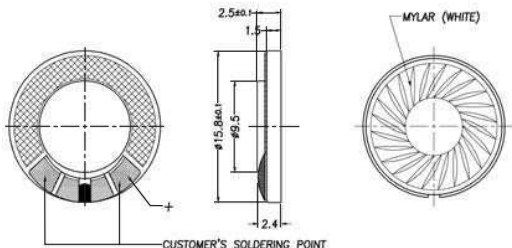
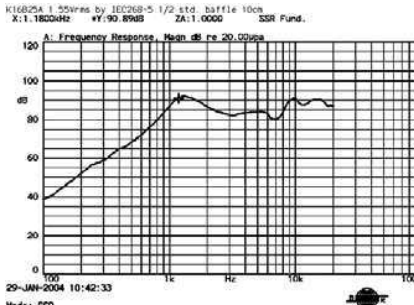

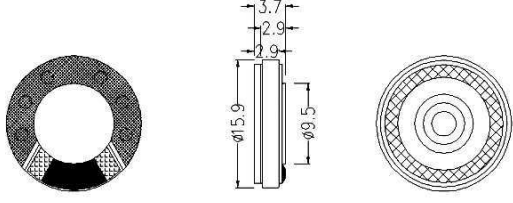
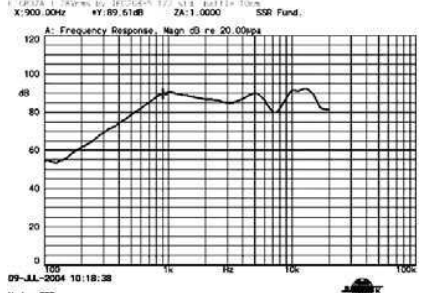

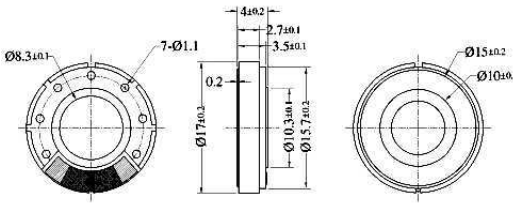
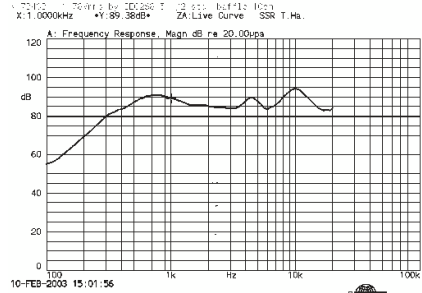


Part No.	K15B34G	K15B34H	K16B25A
Nominal Impedance	8Ω ± 15%	8Ω ± 15%	8Ω ± 15%
Resonant frequency(Fo)	670Hz±20%	950Hz±20%	1180Hz±20%
Effective Freq. Range	Fo~20KHz	Fo~20KHz	Fo~20KHz
Sound Pressure Level(dB)	88±3dB / 10cm	94±3dB / 10cm	83±3dB / 10cm
Input Power (Nom. / Max.)	0.3W / 0.4W	0.5W / 1.0W	0.3W / 0.5W
Distortion	5%max. at 2.5KHz	5%max. at 2KHz	10%max. at 1KHz
Operating Temp range	-20°C ~ +60°C	-20°C ~ +60°C	-25°C ~ +60°C

<p><b>K15B34G</b></p> 		
<p><b>K15B34H</b></p> 		
<p><b>K16B25A</b></p> 		

Part No.	K16B37A	K17B40B	K17C39A
Nominal Impedance	8Ω ± 15%	8Ω ± 15%	16Ω ± 15%
Resonant frequency(Fo)	990Hz±20%	700Hz±20%	850Hz±20%
Effective Freq. Range	Fo~20KHz	Fo~20KHz	Fo~20KHz
Sound Pressure Level(dB)	87±3dB / 10cm	90±3dB / 10cm	90±3dB / 10cm
Input Power (Nom. / Max.)	0.5W / 0.7W	0.4W / 0.6W	0.5W / 0.8W
Distortion	5%max. at 2KHz	5%max. at 1KHz	10%max. at 1KHz
Operating Temp range	-20°C ~+60°C	-25°C ~+60°C	-20°C ~+70°C

<p><b>K16B37A</b></p> 		
<p><b>K17B40B</b></p> 		
<p><b>K17C39A</b></p> 