
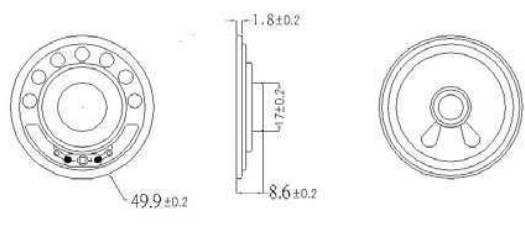
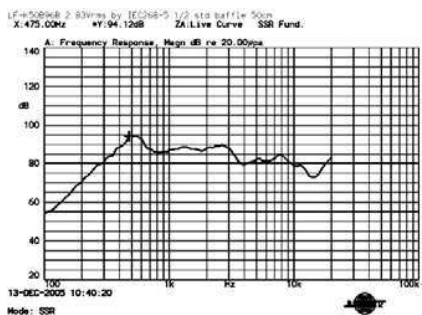

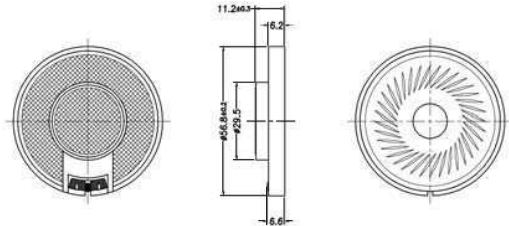
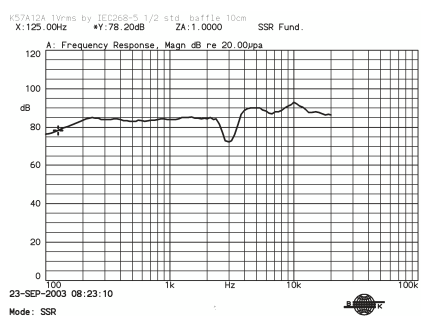

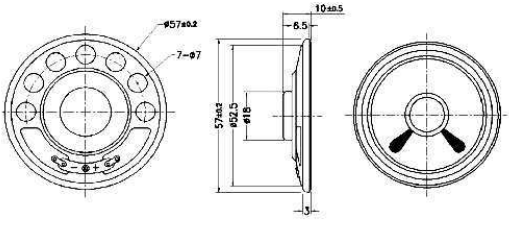
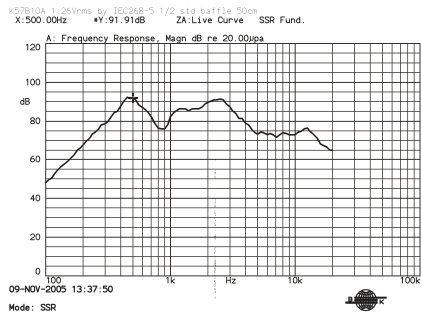

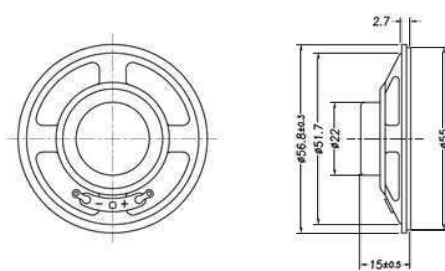
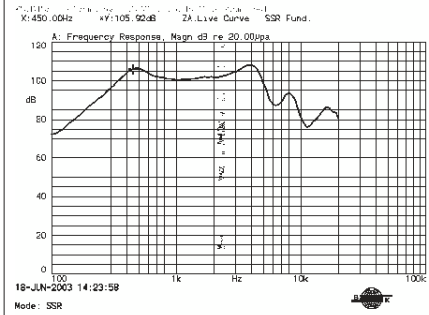

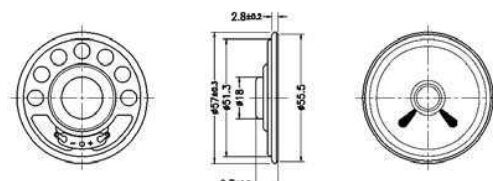
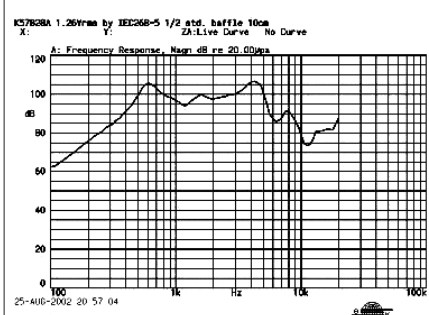


Part No.	K50B96B	K57A12A	K57B10A
Nominal Impedance	8Ω ±15%	4Ω ±15%	8Ω ±15%
Resonant frequency(Fo)	480Hz±20%	125Hz±20%	500Hz±20%
Effective Freq. Range	Fo~4.8KHz	Fo~20KHz	Fo~6KHz
Sound Pressure Level(dB)	90±3dB / 50cm	85±3dB / 10cm	85±3dB / 50cm
Input Power (Nom. / Max.)	2.0W / 3.0W	0.25W / 0.4W	0.2W/0.5W
Distortion	5%max. at 1KHz	10%max. at 1KHz	10%max. at 1KHz
Operating Temp range	-25°C ~+50°C	-20°C ~+60°C	-20°C ~+60°C

<p>K50B96B</p> 		
<p>K57A12A</p> 		
<p>K57B10A</p> 		

Part No.	K57B15A	K57B28A	K58B26A
Nominal Impedance	8Ω ± 15%	8Ω ± 15%	8Ω ± 15%
Resonant frequency(Fo)	380Hz±20%	575Hz±20%	340Hz±20%
Effective Freq. Range	Fo~20KHz	Fo~6KHz	Fo~20KHz
Sound Pressure Level(dB)	105±3dB / 10cm	100±3dB / 10cm	85±3dB / 50cm
Input Power (Nom. / Max.)	0.25W / 0.5W	0.2W / 0.5W	4.0W / 5.0W
Distortion	5%max. at 1KHz	5%max. at 1KHz	5%max. at 1KHz
Operating Temp range	-20°C ~ +60°C	-20°C ~ +60°C	-20°C ~ +60°C

<p>K57B15A</p> 		
<p>K57B28A</p> 		
<p>K58B26A</p> 