
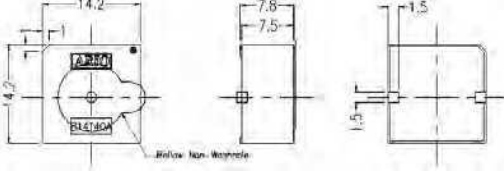
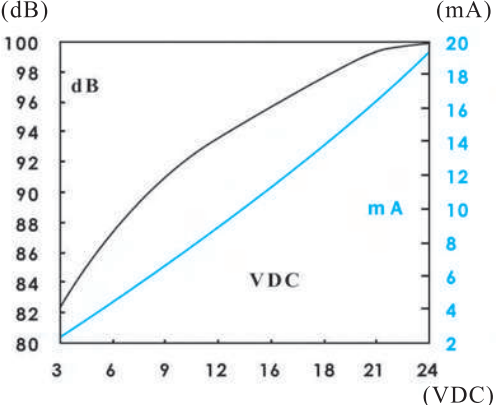

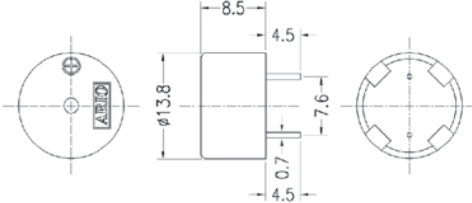

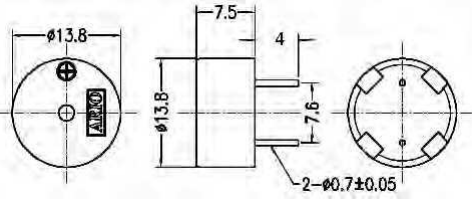


<p>PB14T40A-A</p>  <p>SMD Package Reflow, Non-washable</p>		
<p>PB14P40A</p>  <p>Pin Type Non-washable</p>		
<p>PB14P40D</p>  <p>Pin Type Non-washable</p>		

Piezoelectric
Buzzer Series

Part No.	※Sound Pressure Level (dB min.)	Current Consumption 9VDC(mA)	Oscillating Frequency (±0.5KHz)	Working Voltage (VDC)	Operating Temp.(°C)	Weight (gms)
PB14T40A-A	85	9.0 max.	4.5 Continuous tone	3 ~ 24	-20~+105	2.0
PB14P40A	85	9.0 max.	4.3 Continuous tone	3 ~ 24	-20~+105	1.0
PB14P40D	85	9.0 max.	4.3 Continuous tone	3 ~ 24	-20~+105	1.0

※ at 9VDC 10cm.