
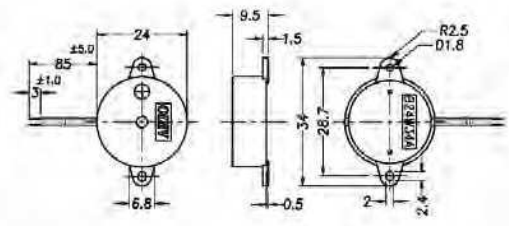
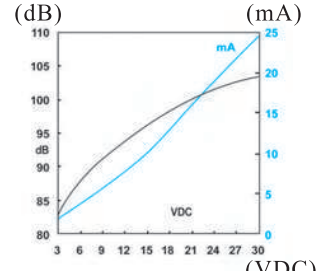

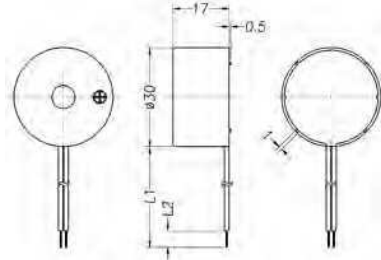
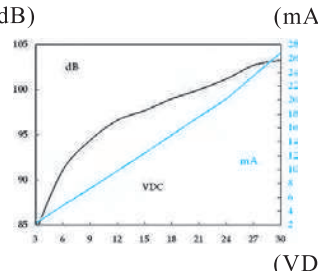

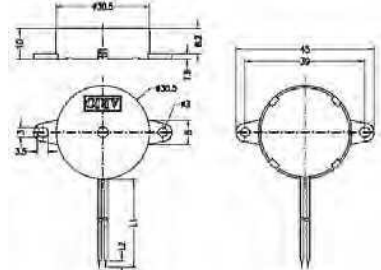
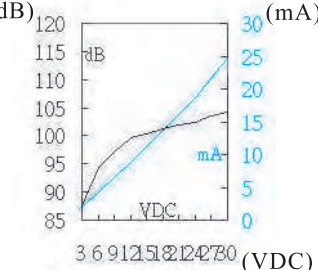

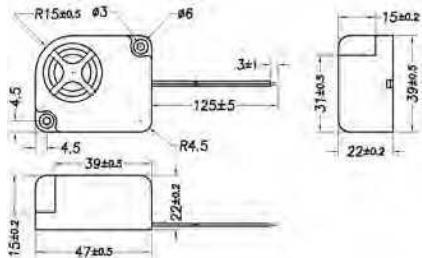

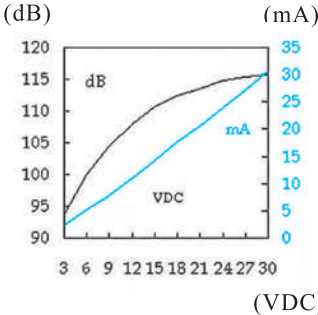
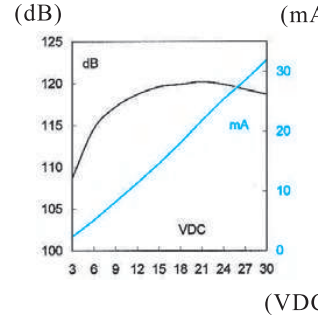
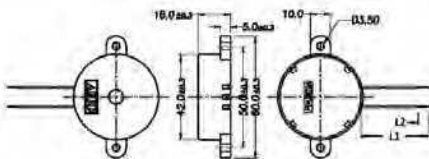
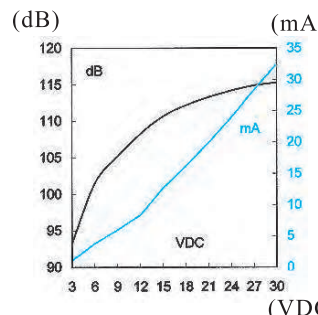
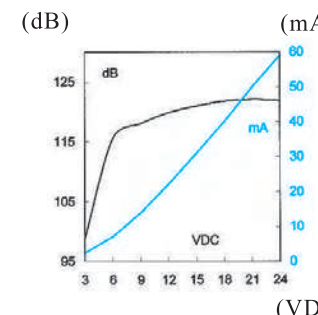


<p>PB24W34A</p>  <p>Lead Wire Type</p>		
<p>PB30W25A PB30W25B</p>  <p>Lead Wire Type</p>		
<p>PB30W25C</p>  <p>Lead Wire Type</p>		
<p>PB50W01A</p>  <p>Lead Wire Type</p>		

Piezoelectric Buzzer Series

Part No.	※Sound Pressure Level (dB min.)	Current Consumption 9VDC(mA)	Oscillating Frequency (±0.5KHz)	Working Voltage (VDC)	Operating Temp.(°C)	Weight (gms)
PB24W34A	88	8.0 max.	3.4 Continuous tone	3 ~ 30	-20~+105	11.5
PB30W25A	85	8.0 max.	2.5 Continuous tone	3 ~ 30	-20~+105	12.0
PB30W25B	100	16.0 max.	2.5 Continuous tone	3 ~ 30	-20~+105	13.5
PB30W25C	88	9.0 max.	2.5 Continuous tone	3 ~ 30	-20~+105	13.5
PB50W01A	105 At 12 VDC	150.0 max. At 12 VDC	1.5 ~ 3.5 Tone/Pulse rate : Sweep 3.3	12	-20~+60	13.0


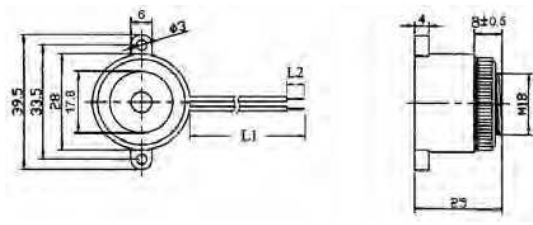
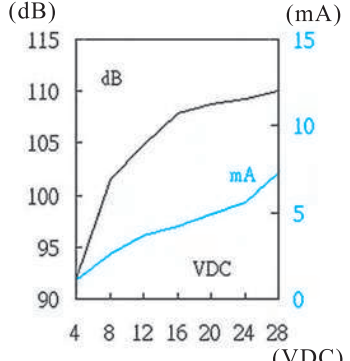

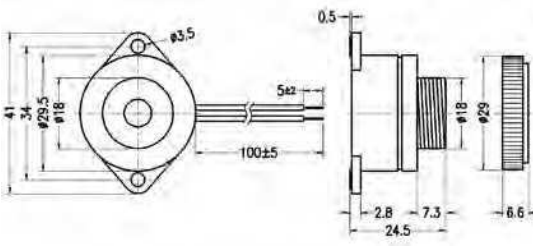
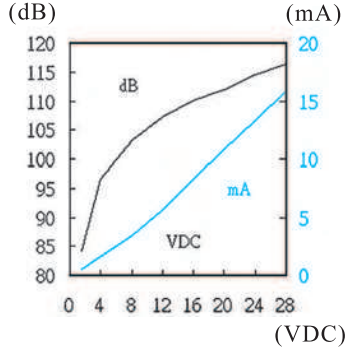

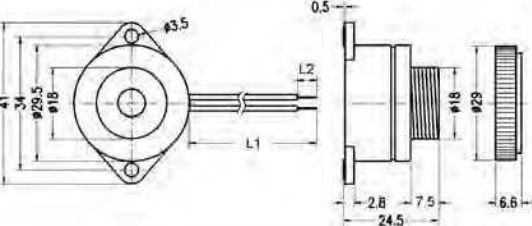
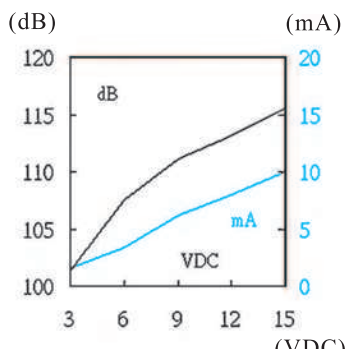
※ at 9VDC 10cm.

<p>PB42W29A PB42W29B PB42W29C PB42W29D</p>  <p>Lead Wire Type</p>	<p>PB42W29A</p> 	<p>PB42W29B</p> 
	<p>PB42W29C</p> 	<p>PB42W29D</p> 

Piezoelectric Buzzer Series


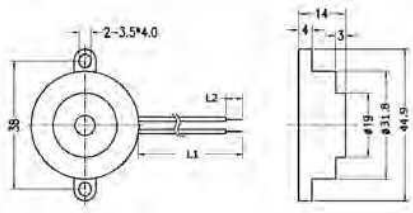
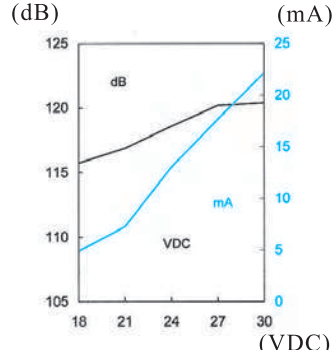

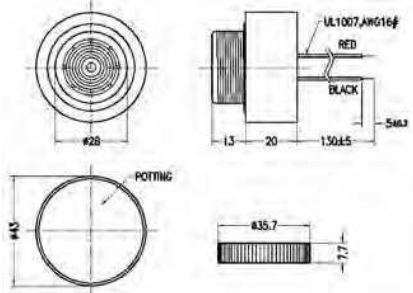
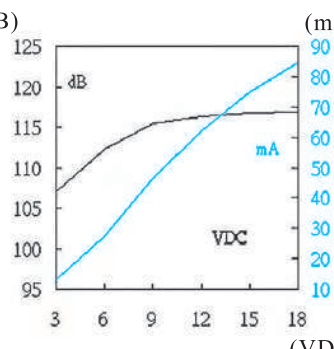

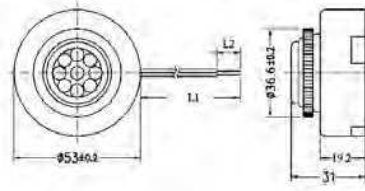
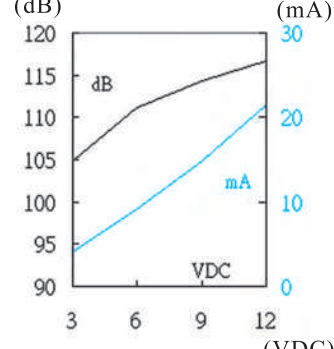
Part No.	※Sound Pressure Level (dB min.)	Current Consumption 9VDC(mA)	Oscillating Frequency (±0.5KHz)	Working Voltage (VDC)	Operating Temp.(°C)	Weight (gms)
PB42W29A	95	10.0 max.	2.9 Continuous tone	3 ~ 30	-20~+105	13.0
PB42W29B	110	13.0 max.	2.9 Continuous tone	3 ~ 24	-20~+105	13.5
PB42W29C	105	12.0 max.	2.9 Pulse tone	3 ~ 30	-20~+105	13.5
PB42W29D	110	18.0 max.	2.9 Dual tone	3 ~ 15	-20~+105	13.0

※ at 9VDC 10cm.

<p>PB28W35A</p>  <p>Panel mounted type</p>		
<p>PB30W32A PB30W32A-12</p>  <p>Panel mounted type</p>		
<p>PB30W35A-12 PB30W35A-24</p>  <p>Panel mounted type</p>		

Piezoelectric Buzzer Series

Part No.	※Sound Pressure Level 10cm(dB min.)	Current Consumption (mA)	Oscillating Frequency (±0.5KHz)	Working Voltage (VDC)	Operating Temp.(°C)	Weight (gms)
PB28W35A	95	10 max. /12V	3.5 Fast pulse	4 ~ 28	-20~+60	15.0
PB30W32A	100	20 max. /24V	3.2 Continuous tone	1.5 ~ 28	-20~+60	15.0
PB30W32A-12	100	12 max. /12V	3.2 Pulse tone	3 ~ 15	-20~+60	15.0
PB30W35A-12	100	15 max. /12V	3.5 Continuous tone	1.5 ~ 16	-20~+60	15.0
PB30W35A-24	105	20 max. /24V	3.5 Continuous tone	1.5 ~ 28	-20~+60	15.0

<p>PB32W37A-24</p> 		
<p>PB43W29A</p>  <p>Panel mounted type</p>		
<p>PB53W28A</p>  <p>Panel mounted type</p>		

Piezoelectric Buzzer Series

Part No.	※Sound Pressure Level 10cm(dB min.)	Current Consumption (mA)	Oscillating Frequency (±0.5KHz)	Working Voltage (VDC)	Operating Temp.(°C)	Weight (gms)
PB32W37A-24	110	20 max. /24V	3.7 Continuous tone	18 ~ 30	-20~+60	15.0
PB43W29A	110	60 max. /9V	2.9 Continuous tone	3 ~ 20	-20~+60	43.0
PB53W28A	100	20 max. /9V	2.8 Continuous tone	3 ~ 12	-20~+60	38.0