


## CABLE TIES

- ┆ MATERIAL: NYLON 66(UL)
- ┆ FLAME CLASS :94V-2
- ┆ COLOR:NATURAL/BLACK
- ┆ UNIT:□




### SELF-LOCKING TIES:

NEW PART NO.	PART NO.	APPROX. LENGTH	APPROX. WIDTH	MAX BUNDLE DIA	MIN. LOOP TENSILE STRENGTH kgs(Lbs.)	PACKAGE
YPGTC-80M	YJ-80	80(3.15")	2.5(0.10")	17(0.67")	8(18)	1000PCS
YPGTC-90M	YJ-90	90(3.54")		21(0.83")		
-----	YJ-98	98(3.86")		22(0.87")		
YPGTC-100M	YJ-100	100(4.00")		23(0.91")		
YPGTC-120M	YJ-120	120(4.72")		30(1.18")		
YPGTC-140M	YJ-142S	142(5.59")		36(1.42")		
YPGTC-160M	YJ-160	160(6.30")		42(1.66")		
-----	YJ-181	181(7.13")		49(1.92")		
YPGTC-200M	YJ-203S	203(8.00")		56(2.21")		
-----	YJ-102	102(4.00")		3.6(0.14")		
YPGTC-120I	YJ-122	122(4.80")	29(1.14")			
YPGTC-140I	YJ-142	142(5.59")	34(1.34")			
-----	YJ-163	163(6.41")	40(1.57")			
YPGTC-180I	YJ-185	185(7.28")	47(1.85")			
YPGTC-200I	YJ-203	203(8.00")	55(2.17")			
YPGTC-250I	YJ-232	232(9.13")	63(2.48")			
-----	YJ-263	263(10.35")	73(2.87")			
YPGTC-300I	YJ-295	295(11.61")	83(3.27")			
-----	YJ-331	331(13.00")	96(3.78")			
YPGTC-370I	YJ-370	370(14.57")	108(4.25")			
YPGTC-120ST	YJ-115	115(4.53")	4.8(0.19")	29(1.15")	23(50)	500PCS
YPGTC-150ST	YJ-140	140(4.50")		34(1.34")		
YPGTC-160ST	YJ-162	162(6.38")		42(1.66")		
YPGTC-190ST	YJ-188	188(7.40")		49(1.93")		
YPGTC-200ST	YJ-201	201(8.00")		53(2.08")		
YPGTC-216ST	YJ-216	216(8.50")		58(2.28")		
YPGTC-250ST	YJ-242	242(9.53")		66(2.60")		
YPGTC-266ST	YJ-266	266(10.47")		72(2.84")		
YPGTC-300ST	YJ-292	292(11.50")		82(3.23")		
-----	YJ-330	330(13.00")		93(3.66")		
YPGTC-370ST	YJ-368	368(14.49")		106(4.17")		
YPGTC-430ST	YJ-410	410(16.14")		122(4.80")		
YPGTC-450ST	YJ-450	450(17.72")		135(5.31")		
YPGTC-150HD	YJ-148	148(5.83")	7.6(0.30")	36(1.42")	54(120)	100PCS
YPGTC-200HD	YJ-182	182(7.17")		46(1.81")		
-----	YJ-215	215(8.46")		59(2.32")		
YPGTC-250HD	YJ-254	254(10.00")		71(2.80")		
YPGTC-300HD	YJ-293	293(11.54")		84(3.30")		
-----	YJ-332	332(13.00")		95(3.74")		
YPGTC-370HD	YJ-368L	368(14.49")		109(4.29")		
-----	YJ-420	420(16.54")		124(4.88")		
-----	YJ-470	470(18.50")		140(5.51")		
-----	YJ-520	520(20.47")		156(6.14")		
-----	YJ-178	178(7.00")	9.0(0.35")	45(1.76")	80(175)	100PCS
-----	YJ-229	229(9.00")		61(2.40")		
-----	YJ-280	280(11.00")		77(3.03")		
-----	YJ-329	329(13.00")		93(3.66")		
-----	YJ-382	382(15.00")		110(4.33")		
-----	YJ-458	458(18.00")		135(5.32")		
YPGTC-530HD	YJ-530	530(20.87")		155(6.10")		
-----	YJ-655	655(25.79")		194(7.64")		
YPGTC-780HD	YJ-780	780(30.71")		234(9.21")		
YPGTC-830HD	YJ-815	815(32.00")		247(9.72")		


## CABLE TIES

- ┆ MATERIAL: NYLON 66(UL)
- ┆ FLAME CLASS :94V-2
- ┆ COLOR: NATURAL/BLACK
- ┆ UNIT: mm □

HOLE IN CHASSIS  $\phi 4.0$   
 CHASSIS THICKNESS 1.0~2.5




PUSH SELF-LOCKING TIES:



PART NO	APPROX LENGTH □(in)	APPROX WIDTH □(in)	MAX BUNDLE □(in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
YPYJC-123	123(4.84")	3.4(0.13")	25.4(1.00")	18.(40)	500pcs

HOLE IN CHASSIS  $\phi 6.0$   
 CHASSIS THICKNESS 0.8~1.5





PUSH TIES-RELEASABLE :



PART NO	APPROX LENGTH □(in)	APPROX WIDTH □(in)	MAX BUNDLE □(in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
YPYJC-151	151(6.00")	7.8(0.30")	37(1.45")	40(88)	100pcs
YPYJC-191	191(7.50")		49(1.92")		
YPYJC-231	231(9.00")		62(2.44")		

## CABLE TIES

- ┆ MATERIAL: NYLON 66(UL)
- ┆ FLAME CLASS :94V-2
- ┆ COLOR: NATURAL
- ┆ UNIT: mm □

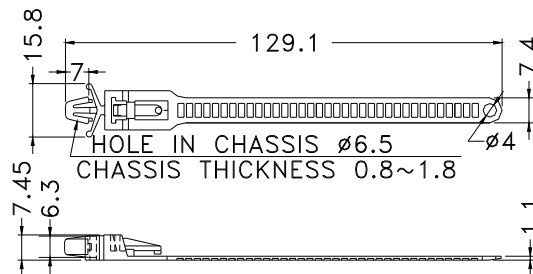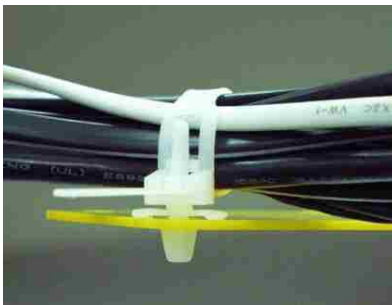

PART NO	PACKAGE
YPKYCCB-129	250

## CABLE TIES

- ┆ MATERIAL: NYLON 66(UL)
- ┆ FLAME CLASS :94V-2
- ┆ COLOR:NATURAL/BLACK
- ┆ UNIT:mm□



RELEASABLE TIES:




PART NO	APPROX LENGTH □(in)	APPROX WIDTH □(in)	MAX BUNDLE □(in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
YPYJC-228	228(9.00")	12.7(0.50")	54(2.12")	114(250)	100pcs
YPYJC-256	256(10.00")		62(2.44")		
YPYJC-279	279(11.00")		70(2.75")		
YPYJC-305	305(12.00")		78(3.07")		
YPYJC-328	328(13.00")		86(3.38")		
YPYJC-355	355(14.00")		94(3.70")		
YPYJC-380	380(15.00")		102(4.00")		
YPYJC-405	405(16.00")		110(4.33")		
YPYJC-430	430(17.00")		118(4.64")		
YPYJC-455	455(18.00")		127(5.00")		
YPYJC-485	485(19.00")		135(5.31")		
YPYJC-510	510(20.00")		143(5.62")		
YPYJC-534	534(21.00")		151(5.94")		
YPYJC-560	560(22.00")		159(6.25")		
YPYJC-585	585(23.00")		167(6.57")		
YPYJC-610	610(24.00")		175(6.88")		
YPYJC-635	635(25.00")		183(7.20")		
YPYJC-660	660(26.00")		191(7.51")		
YPYJC-685	685(27.00")		199(7.83")		
YPYJC-710	710(28.00")		207(8.14")		
YPYJC-735	735(29.00")	215(8.46")			
YPYJC-760	760(30.00")	224(8.81")			
YPYJC-790	790(31.00")	232(9.19")			
YPYJC-813	813(32.00")	243(9.57")			
YPYJC-915	915(36.00")	274(10.79")			
YPYJC-1042	1042(41.00")	314(12.36")			
YPYJC-1168	1168(46.00")	354(13.94")			

## CABLE TIES


- ┆ MATERIAL: NYLON 66(UL)
- ┆ FLAME CLASS :94V-2
- ┆ COLOR:NATURAL/BLACK
- ┆ UNIT:mm

RELEASABLE TIES:




PART NO	APPROX LENGTH (in)	APPROX WIDTH □(in)	MAX BUNDLE (in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
YPYJC-300	300(11.81")	7.6(0.30")	86(3.38")	23(50)	100pcs
YPYJC-350	350(13.87")		102(4.02")		
YPYJC-400	400(15.75")		118(4.65")		
YPYJC-R655	655(25.79")	9.0(0.35")	194(7.64")	80(175)	
YPYJC-R780	780(30.71")		234(9.21")		
YPYJC-R815	815(32.00")		247(9.72")		

MARKER TIES:

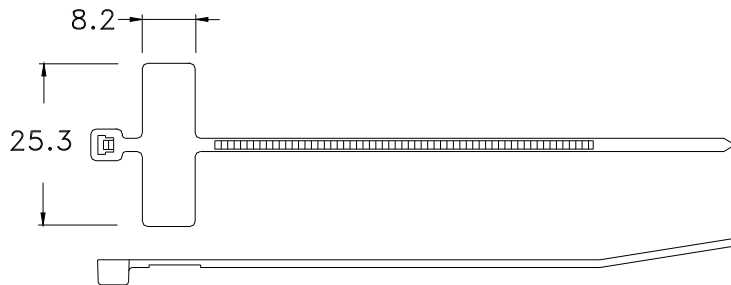


PART NO	APPROX LENGTH (in)	APPROX WIDTH (in)	MAX BUNDLE (in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
YPYJC-98X	100(4.00")	2.5(0.10")	22.(0.87")	8(18)	1000pcs

CLAMP MOUNTING TIES:



PART NO	APPROX LENGTH □(in)	APPROX WIDTH □(in)	D	MAX BUNDLE □(in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
YPYJC-110	110(4.33")	2.8(0.11")	3.2	23(0.91")	10(22)	500pcs
YPYJC-156	156(6.14")	3.6(0.14")	4.2	35(1.38")	18(40)	1000pcs
YPYJC-205	205(8.00")	4.8(0.19")	5.4	51(2.01")	23950)	
YPYJC-255	255(10.00")			67(2.64")		
YPYJC-304	304(12.00")			83(3.98")		
YPYJC-356	356(14.00")	7.6(0.30")	6.4	101(3.98")	54(120)	500pcs
YPYJC-406	406(16.00")			118(4.64")		
YPYJC-230	230(9.00")			58(2.28")		
YPYJC-306	306(12.00")	7.6(0.30")	6.4	84(3.31")	54(120)	100pcs
YPYJC-381	381(15.00")			108(4.25")		
YPYJC-460	460(18.00")			133(5.24")		
YPYJC-535	535(21.00")			155(6.10")		


RELEASABLE TIES:



PART NO	APPROX LENGTH (in)	APPROX WIDTH □(in)	MAX BUNDLE (in)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
YPYJC-150	150(5.90")	7.5(0.295")	38(1.54")	23(50)	100pcs
YPYJC-200	200(7.87")		56(2.21")		1000pcs
YPYJC-250	250(9.84")		72(2.83")		

## STRAP TIES


- ┆ MATERIAL:P.E
- ┆ COLOR:NATURAL
- ┆ UNIT:mm



PART NO	A	B	C	D	PACKAGE
YPSTC-2	135.0	15.8	21.4	10.0	500
YPSTC-3	140.0	15.4	24.5	10.0	

## STRAP TIES


- ┆ MATERIAL:PE
- ┆ COLOR:NATURAL
- ┆ UNIT:mm

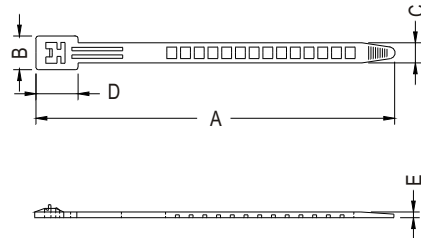

PART NO.	A	B	C	D	E	PACKAGE
YPSTC-1	157	14.7	8.6	18.3	1.5	500
YPSTC-4	205	15.0	8.6	18.3	1.7	
YPSTC-5	125	13.0	7.5	16.0	1.45	

## STRAP TIES


- ┆ MATERIAL:NYLON 66(UL)
- ┆ FLAME CLASS :94V-2/94V-0
- ┆ COLOR:NATURAL
- ┆ UNIT:mm

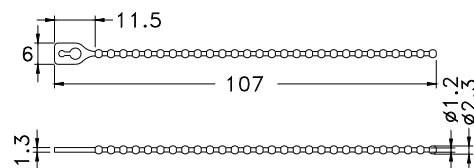

PART NO	BUNDLE DIA	TENSILE STRENGTH	PACKAGE
YPGTCB-100	29(1.14)	4kg/8.8lbs	1000

## STRAP TIES


- ┆ MATERIAL:P.E
- ┆ COLOR:NATURAL
- ┆ UNIT:mm

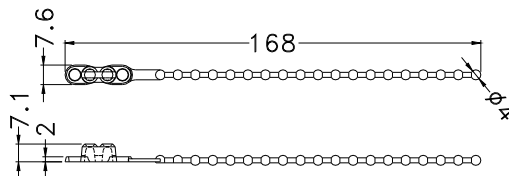


PART NO	PACKAGE
YPSTCO-166	500

## CABLE TIES


- ┆ MATERIAL:NYLON 66(UL)
- ┆ FLAME CLASS :94V-2
- ┆ COLOR:NATURAL
- ┆ UNIT:mm

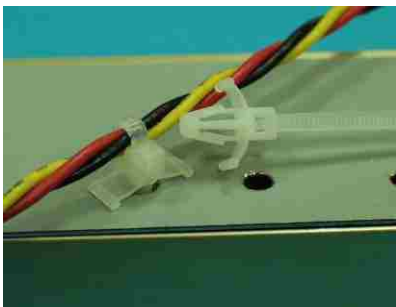

STYLE 1



STYLE 2

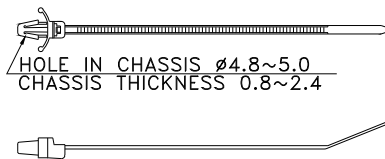



STYLE 3





PART NO.	Approx. Length (inch)	Approx. Width (inch)	Max. Bundle Dia. (inch)	Min.LOOP Tensile Strength kg(lbs)	Hole Diameter	Max. Panel Thickness	STYLE	PACKAGE	
YPGTCP-130ST	130 5.12	4.8 0.19	25 0.98	22.2 50	6.4 0.252	3.2 0.126	3	1000	
YPGTCP-170ST	170 6.69		38 1.50				3		
YPGTCP-190ST	195 7.68		45 1.77				3		
YPGTCP-110M	110 4.33	2.5 0.10	22 0.87	8.1 18	4.8 0.189	2.4 0.094	3		
YPGTCP-110MA			2						
YPGTCP-130I	130 5.12	3.2 0.13	28 1.10	13.6 30	4.0 0.157	2.0 0.079	3		
YPGTCP-150I	150 5.91	3.6 0.14	32 1.26	13.6 30	5.2 0.205	2.8 0.110	1		
YPGTCP-200ST	200 7.87	4.8 0.19	46 1.81	22.2 50	6.3 0.248	3.6 0.141	1		
Releasable Cable Tie									
YPGTCRP-130I	130 5.12	3.2 0.13	28 1.10	13.6 30			3		1000

## STRAP TIES

- ┆ MATERIAL: NYLON 66(UL)
- ┆ FLAME CLASS :94V-2
- ┆ COLOR:NATURAL
- ┆ UNIT:mm





PART NO  
YPLOCCK-145

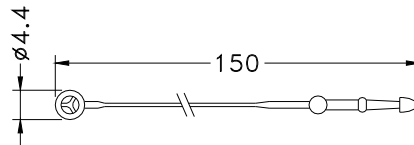


PART NO  
YPLOCCK-150

## A.G.P CARD HOLDER

- ┆ MATERIAL: NYLON 66(UL)
- ┆ FLAME CLASS :94V-2
- ┆ COLOR:BLACK
- ┆ UNIT:mm

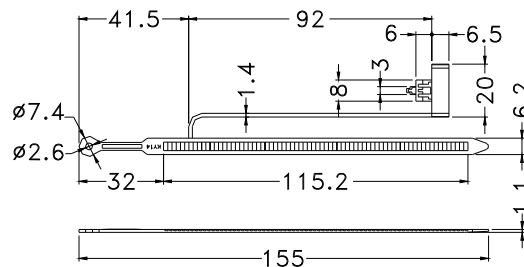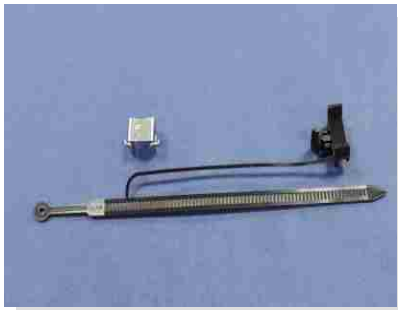


PART NO  
YPAGCP-1A

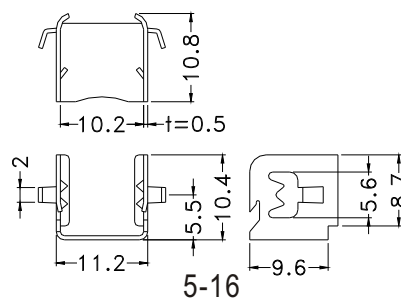

PART NO  
YPAGCP-1B

## CABLE MOUNT

- ┆ MATERIAL: NYLON 66 UL94V-2
- ┆ COLOR: BLACK
- ┆ UNIT: mm

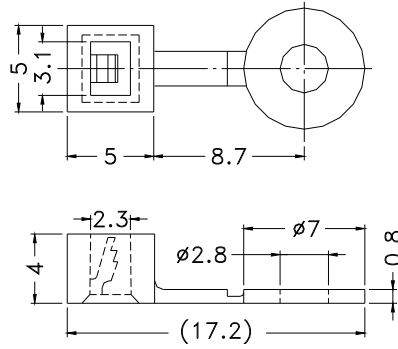


PART NO	PACKAGE
YPASCUS-1	1000



## NON HEAT-SHRINKABLE PVC TUBING

- ┆ MATERIAL:P.V.C
- ┆ COLOR:BLACK/CLEAR
- ┆ UNIT:mm

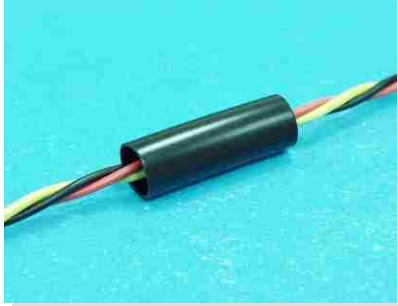

PACKAGE			
PART NO	FEET	(M)	(m/m)
P0.864~P5.94	1000	(304.8)	(304800)
P6.68~P11.1B	500	(152.4)	(152400)
P12.7B			
P11.1	250	(76.2)	(76200)
P12.7			

PART NO	SIZE AWG	INSIDE DIAMETER	CAT.NO. DEV-300(300V.105 )			CAT.NO. DEV-600 (600V.105 )		
			MIN TEICKNESS AT ANY POINT	AVG THICKNESS	OUTSIDE DIAMETER	MIN THICKNESS AT ANY POINT	AVG THICKNESS	OUTSIDE DIAMETER
P0.864	20	0.864	0.330	0.40	1.70	0.431	0.60	2.10
P0.965	19	0.965	0.330	0.40	1.80	0.431	0.60	2.20
P1.067	18	1.067	0.330	0.40	1.90	0.431	0.60	2.30
P1.19	17	1.19	0.330	0.40	2.00	0.559	0.70	2.60
P1.34	16	1.34	0.330	0.40	2.15	0.559	0.70	2.75
P1.50	15	1.5	0.330	0.40	2.30	0.559	0.70	2.90
P1.68	14	1.68	0.330	0.40	2.50	0.559	0.70	3.10
P1.93	13	1.93	0.330	0.40	2.70	0.559	0.70	3.35
P2.16	12	2.16	0.330	0.40	3.00	0.559	0.70	3.60
P2.41	11	2.41	0.330	0.40	3.20	0.559	0.70	3.80
P2.69	10	2.69	0.330	0.40	3.50	0.559	0.70	4.10
P3.00	9	3.00	0.431	0.55	4.10	0.559	0.70	4.40
P3.38	8	3.38	0.431	0.55	4.50	0.559	0.70	4.80
P3.76	7	3.76	0.431	0.55	4.90	0.559	0.70	5.20
P4.22	6	4.22	0.431	0.55	5.35	0.559	0.70	5.65
P4.72	5	4.72	0.431	0.55	5.85	0.559	0.70	6.15
P5.28	4	5.28	0.431	0.55	6.40	0.559	0.70	6.70
P5.94	3	5.94	0.431	0.55	7.05	0.559	0.70	7.35
P6.68	2	6.68	0.431	0.55	7.80	0.559	0.70	8.10
P7.47	1	7.47	0.431	0.55	8.60	0.559	0.70	8.90
P8.38	0	8.38	0.431	0.55	9.50	0.559	0.70	9.80
P7.92	5/16"	7.92				0.559	0.70	9.35
P9.53	3/8"	9.53				0.559	0.70	10.95
P11.1	7/16"	11.10				0.559	0.70	12.50
P12.7	1/2"	12.70				0.559	0.70	14.10

## HEAT-SHRINKABLE TUBING


- ┆ MATERIAL:POLYOLEFIN
- ┆ COLOR:BLACK
- ┆ UNIT:mm



PART NO	DIMENSIONS BEFORE SHRINKAGE		DIMENSIONS AFTER SHRINKAGE		PACKAGE	
	(D) INSIDE DIA	(t) THICKNESS	INSIDE DIA	(t) THICKNESS	M/1 ROLL	mm/1 ROLL
1.0	1.3	0.2	0.5	0.33	200	200000
1.5	2.0	0.2	0.75	0.36		
2.0	2.5	0.2	1.0	0.44		
2.5	3.0	0.25	1.25	0.44		
3.0	3.5	0.25	1.5	0.44		
3.5	4.0	0.25	1.75	0.44		
4.0	4.5	0.25	2.0	0.44	100	100000
5.0	5.4	0.25	2.5	0.56		
6.0	6.4	0.25	3.0	0.56	50	50000
7.0	7.4	0.25	3.5	0.56		
8.0	8.4	0.25	4.0	0.56		
9.0	9.4	0.25	4.5	0.56		
10.0	10.4	0.25	5.0	0.56		
11.0	11.4	0.25	5.5	0.56		
12.0	12.4	0.25	6.0	0.56		
13.0	13.5	0.3	6.5	0.69		
14.0	14.5	0.3	7.0	0.69		
15.0	15.5	0.3	7.5	0.69		
16.0	16.8	0.3	8.0	0.69		
18.0	18.7	0.35	9.0	0.77		
20.0	21.2	0.35	10.0	0.77		
22.0	23.2	0.4	11.0	0.77		
25.0	26.1	0.4	12.5	0.87		
28.0	29.0	0.5	14.0	0.87		
30.0	32.0	0.5	14.8	0.87		
35.0	37.0	0.5	17.5	0.87		
35.0	37.0	0.5	17.5	0.87		
38.0	39.9	0.5	19.1	0.87		
50.0	53.0	0.5	24.7	0.97	61	61000

## SILICON GLASS FIBER SLEEVING

- ┆ MATERIAL:
- ┆ COLOR:WHITE
- ┆ UNIT:mm

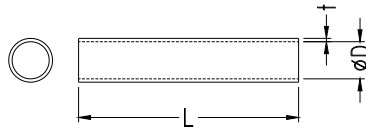

PART NO	(D)	(T)	PACKAGE
	INSIDE DIAMETER	THICKNESS	ROLL
YPTC1	1.0	0.30	200M
YPTC2	2.0	0.30	
YPTC3	3.0	0.30	
YPTC4	4.0	0.30	
YPTC5	5.0	0.40	100M
YPTC6	6.0	0.40	
YPTC7	7.0	0.40	1M
YPTC8	8.0	0.40	
YPTC9	9.0	0.40	
YPTC10	10.0	0.40	
YPTC12	12.0	0.40	
YPTC14	14.0	0.63	
YPTC16	16.0	0.63	
YPTC18	18.0	0.63	
YPTC20	20.0	0.63	
YPTC25	25.0	0.63	

CHARACTER	(BREAK DOWN VOLTAGE)KV							HEAT RESISTANCE	FLAMERESISTANT
	UNDER NORMAL CONDITIONS		AFTER ABSORBING MOISTURE		200 HEATING		BENDING RESISTANCE		
	AVERAGE	MINIMUM	AVERAGE	MINIMUM	AVERAGE	MINIMUM	MINIMUM		
YPLHC-001	3.0	2.0	1.5	1.0	2.0	1.0	2.0	200	45"