

DHN SERIES

Dip Switches

● SPECIFICATIONS

MECHANICAL

Mechanical Life: 1000 operation cycles per switch.

Operation Force: 500gf max.

Operation Temp: -40°C to 85°C

ELECTRICAL

Electrical Life: 1000 operation cycles per switch 24VDC,25mA

Non-Switching Rating: 100mA,50VDC


Contact Resistance: 100mΩ max.at initial.

Insulation Resistance: 100MΩ min (at 500VDC)

Dielectric Strength: 300VAC/1 minute

Capacitance: 5pf max.

HOW TO ORDER

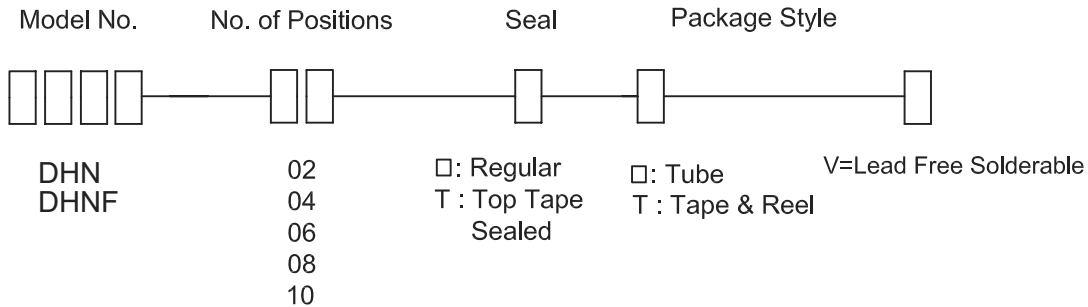

TERMINATION / NUMBER OF POSITIONS

DHN



DHN -10	10	13.93[.548]
DHN - 8	8	11.39[.448]
DHN - 6	6	8.85[.348]
DHN - 4	4	6.31[.248]
DHN - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

DHN - 2



DHNF

DHNF -10	10	13.93[.548]
DHNF - 8	8	11.39[.448]
DHNF - 6	6	8.85[.348]
DHNF - 4	4	6.31[.248]
DHNF - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

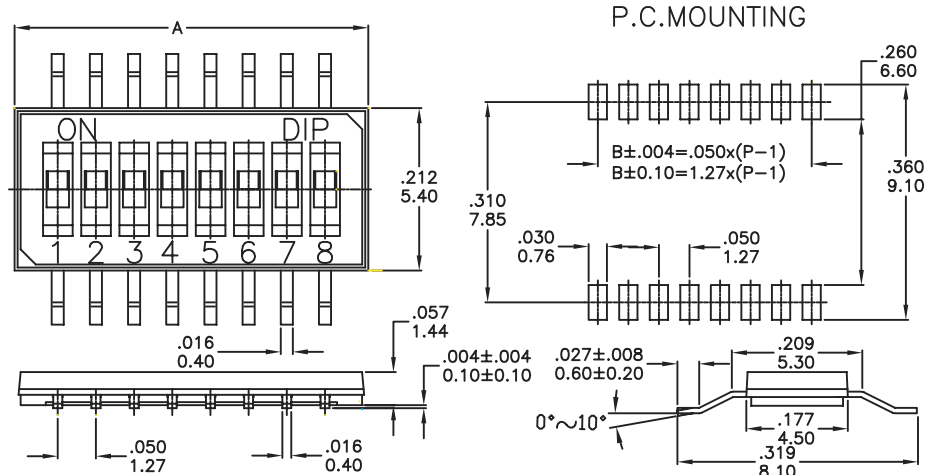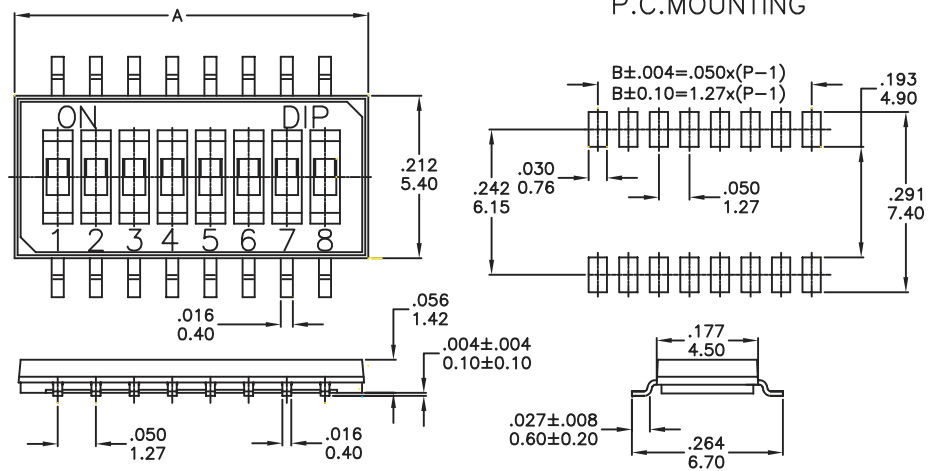

CREST TECHNOLOGIES PTY. LTD.

www.cresttech.com.au

sales@cresttech.com.au

Phone : (03)9873 8830