

### ● SPECIFICATIONS

**CIRCUIT:** SPST.

**CURRENT:** 50mA.

**VOLTAGE RATING:** 12VDC.

**DIELECTRIC WITHSTANDING VOLTAGE:**  
250VAC for 1 minute.

**CONTACT RESISTANCE:** 100mΩ Max(initial).

**INSULATION RESISTANCE:** 100MΩ min.

**OPERATING FORCE:** 160gf±30.

**TOTAL TRAVEL:** 0.25mm±0.2mm.

**OPERATING LIFE:** 100,000CYCLES Min.

**SOLDER SPECIFICATIONS:** 265°C for 5seconds.

**FUNCTION:** Momentary.

**OPERATING TEMPERATURE:** +10°C~+60°C.

### HOW TO ORDER





MODEL NO.	LED COLOR	HOUSING MODEL	HOUSING COLOR	CAP COLOR
TS	0=without LED 3=RED 4=ORANGE 6=GREEN	A=□ B=○	2=BLACK(std) 9=GRAY	2=BLACK(std) 3=RED 4=ORANGE 6=GREEN 9=GRAY

### SWITCHING COMBINATION

#### P.C. MOUNTING



TS-X-A-X-X




# TS Series

## Illuminated Tact Switches




TS-3-A-X-X

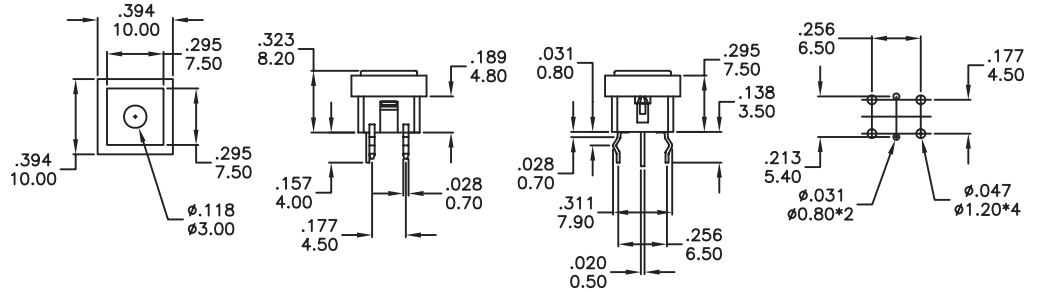

P.C. MOUNTING




TS-X-B-X-X

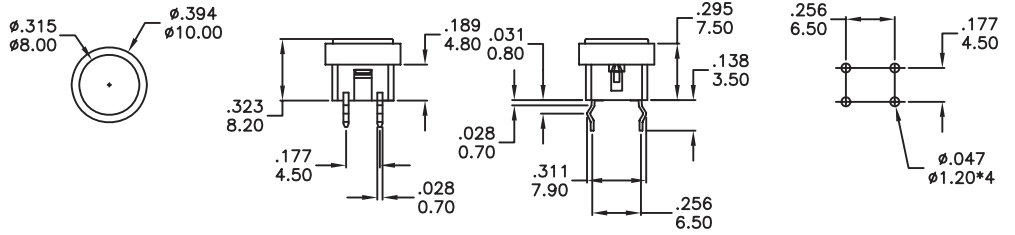

P.C. MOUNTING



TS-3-B-X-X

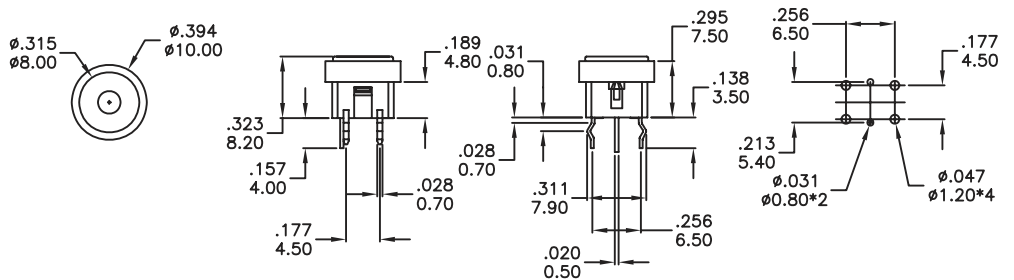

P.C. MOUNTING