




# WX12864L Graphic 128x64 dots

## Dimension drawing

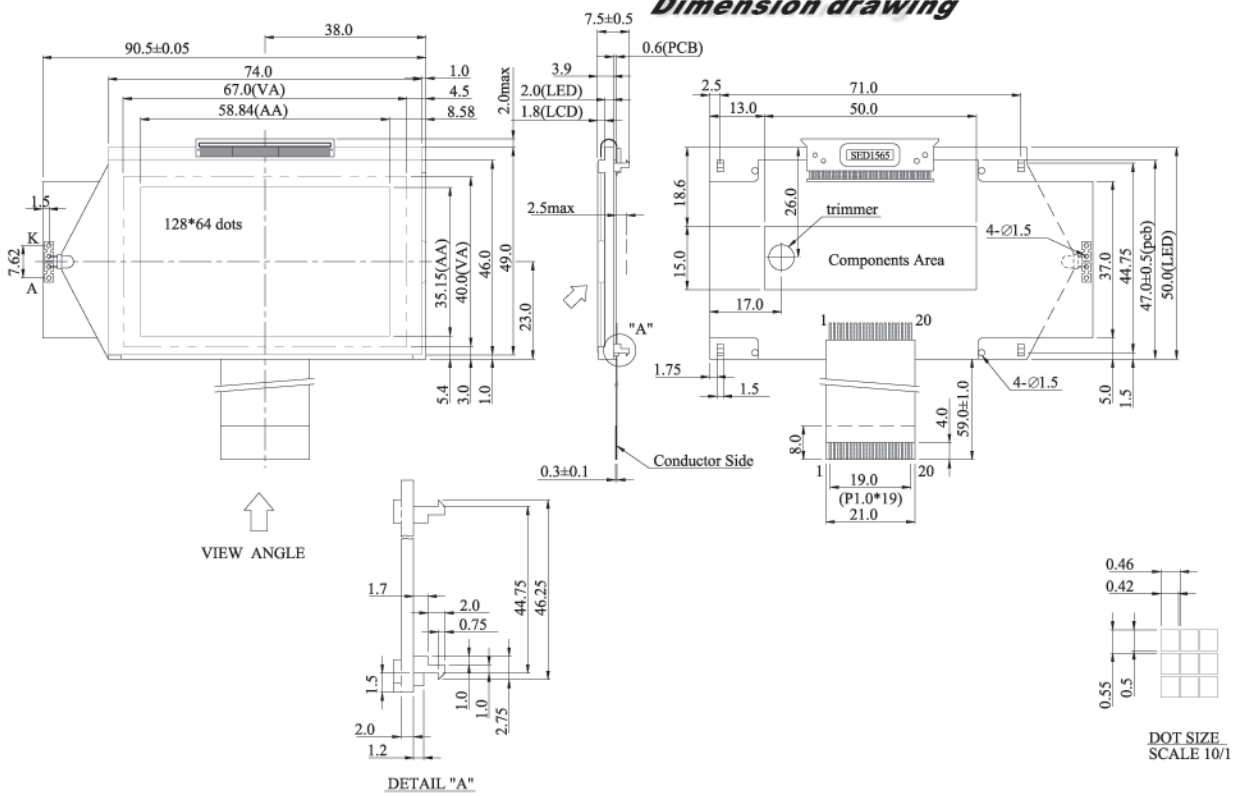

### Feature

1. Controller: EPSON SED15605 (or equivalent)
2. +3.0V power supply
3. 1/64 duty cycle
4. Built-in NV.

Pin NO.	Symbol	Function
1	Vss	GND
2	Vdd	Power Supply(+3.0V)
3	Vo	Contrast Adjustment
4	Ao	H/L:data/command select signal
5	R/W	H/L Read/Write signal
6	E	H→L Enable signal
7	DB0	DB0 Data bus line
8	DB1	DB1 Data bus line
9	DB2	DB2 Data bus line
10	DB3	DB3 Data bus line
11	DB4	DB4 Data bus line
12	DB5	DB5 Data bus line
13	DB6	DB6 Data bus line
14	DB7	DB7 Data bus line
15	CS1	Low:Chip enable
16	P/S	H/L:parallel data/serial data input
17	RST	Reset signal
18	C86	H/L:6800 MPU/8080 MPU interface
19	A	+3.5V for LED
20	K	0V for LED

### Mechanical Data

Item	Standard Value	Unit
Module Dimension	90.5x50.0	mm
Viewing Area	67.0x40.0	mm
Dot Pitch	0.46x0.55	mm

### Absolute Maximum Rating

Item	Symbol	Standard Value			Unit
		min.	typ.	max.	
Power Supply	VDD-VSS	2.7	3.0	3.3	V
Input Voltage	VI	0	---	VDD	V

Note : VSS=0 Volt, VDD=5.0 Volt.

### Electronical Characteristics

Item	Symbol	Condition	Standard Value			Unit
			min.	typ.	max.	
Input Voltage	VDD	VDD=+5V	2.7	3.0	3.3	V
Supply Current	IDD	VDD=5V	---	0.6	0.8	mA
Recommended LC Driving Voltage for Normal Temp. Version module	VDD-V0	-20°C	8.7	8.8	8.9	V
		0°C	8.5	8.6	8.7	
		25°C	8.4	8.5	8.6	
		50°C	8.1	8.2	8.4	
		70°C	7.9	8.0	8.2	
LED Forward Voltage	VF	25°C	---	3.5	3.8	V
LED Forward Current	IF	25°C	---	20	---	mA
EL Power Supply Current	IEL	Vel=110VAC;400Hz	---	---	5.0	mA

Graphic type