


RH RV RM Series Rotary Code Switches

● SPECIFICATIONS

- Voltage Proof:** 250VAC for 1 minute.
- Switching Rating:** 24VDC, 25mA.
- Non-Switching Rating:** 100mA, 50VDC.
- Contact Resistance:** (a) 100mΩ max. (Initial) (b) 200mΩ (final-after test)
- Insulation Resistance:** 100MΩ min, at 250VDC.
- Operating Temperature Range:** -25°C to 80°C.
- Solderability:** 230 ± 5°C 3± sec. 75%
- Electrical Life:** 200mΩ max, 20000 steps.

HOW TO ORDER

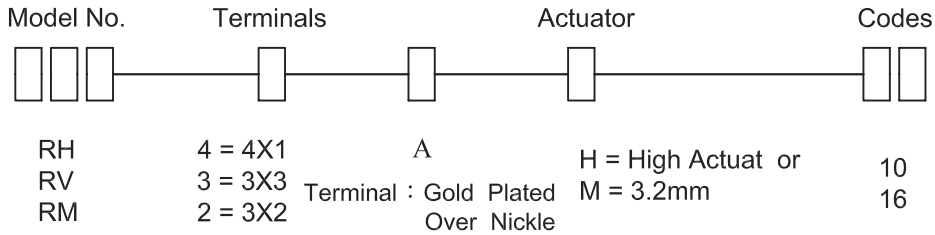

CIRCUIT CHART



TYPE	POSITION	CODE			
		1	2	4	8
○10 (H)	0	●	●	●	●
	1	○	●	●	●
	2	●	○	●	●
	3	○	○	●	●
	4	●	●	○	●
	5	○	●	○	●
	6	●	○	○	●
	7	○	○	○	●
	8	○	●	●	○
	9	○	●	●	○
○16 (H)	A	●	○	●	○
	B	○	○	●	○
	C	●	●	○	○
	D	○	●	○	○
	E	●	○	○	○
	F	○	○	○	○

TYPE	POSITION	CODE			
		1	2	4	8
10 STEP	0	●	●	●	●
	1	○	●	●	●
	2	●	○	●	●
	3	○	○	●	●
	4	●	●	○	●
	5	○	●	○	●
	6	●	○	○	●
	7	○	○	○	●
	8	●	●	●	○
	9	○	●	●	○
16 STEP	A	●	○	●	○
	B	○	○	●	○
	C	●	●	○	○
	D	○	●	○	○
	E	●	○	○	○
	F	○	○	○	○





TYPE	POSITION	CODE			
		1	2	4	8
10 R	0	●	●	●	●
	1	○	●	●	●
	2	●	○	●	●
	3	○	○	●	●
	4	●	●	○	●
	5	○	●	○	●
	6	●	○	○	●
	7	○	○	○	●
	8	○	●	●	○
	9	○	●	●	○
16 R	A	●	○	●	○
	B	○	○	●	○
	C	●	●	○	○
	D	○	●	○	○
	E	●	○	○	○
	F	○	○	○	○





RH2A-XXX



Available Mode No.
 RH2A-10R
 RH2A-16R
 RH2A-16C







Available Mode No.
 RH3HA-10R
 RH3HA-16R
 RH3HA-16C



RH RV RM Series Rotary Code Switches







RH4A-XXX



Available Mode No.
RH4A-10R
RH4A-16R
RH4A-16C







RH3A-XXX



Available Mode No.
RM3A-10R
RM3A-16R
RM3A-16C







RV3A-XXX

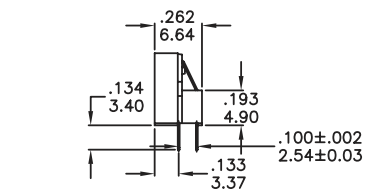




Available Mode No.
RV3A-10R
RV3A-16R
RV3A-16C



RV3HA-XXX

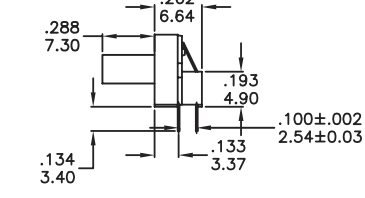

Available Mode No.
RV3HA-10R
RV3HA-16R
RV3HA-16C

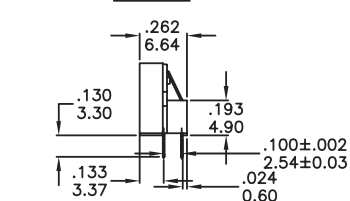

Available Mode No.
RV4A-10R
RV4A-16R
RV4A-16C

Crest Technologies Pty Ltd. www.cresttech.com.au sales@cresttech.com.au +61 3 9873 8830

RH RV RM Rotary Code Switches

